

Barrel Emptying System ViscoMT-XL

Ce document vous est fourni par SUPRATEC SYNEO, partenaire exclusif de Viscotec en France www.supratec-syneo.com

Description



Barrel Emptying System ViscoMT-XL with a volumetric conveying pump basing upon the endless piston principle.

- for medium to high viscosity products (up to 7,000,000 mPas!)
- suited for abrasive, shear sensitive, solid loaded and lumpy media
- neatly wiping of the inner barrel wall by the special lip seal of the follower plate
- applicable at cylindrical, ribbed or slightly conical barrels, plastic drums or bins with inliner
- no pressing of the product at the sides due to a nearly pressureless guiding of the follower plate
- emptying speed electronically adjustable
- simple handling
- pulsation free conveying/emptying

Application


- removal of products directly out of the transport or storage container, for example: tomato paste, honey, fats, glacé icing, mascara, lip gloss, cremes, vaseline®, oinments, gels and a lot more
- pressure regulated or level controlled feeding of the products to filling machines or mixing processes
- direct dosing out of the bin (using a dosing control)

Technical data

drum sizes	200 litres to 1,500 litres
drum heights	up to 1000 mm
flow rates	up to 150 l/min
pump type	2RD60
product touching stainless steel parts	1.4404 (AISI 316 L)/1.4571 (AISI 316 Ti)
elastomers	HNBR, FDA approved
standard designs	portal frame (europallets can be placed beneath the follower plate) frame made of 1.4301 (AISI 304)
control	basic control main switch, (automatic /0/manual, speed control) limit switching of the pump by reed contact („barrel empty“) second reed contact for notification „barrel nearly empty“ security pressure sensor at pump discharge port
including	5 m food hose, open end
air pressure	6 bar required
dimensions	s. example drawing on p. 2



Dimensional drawing

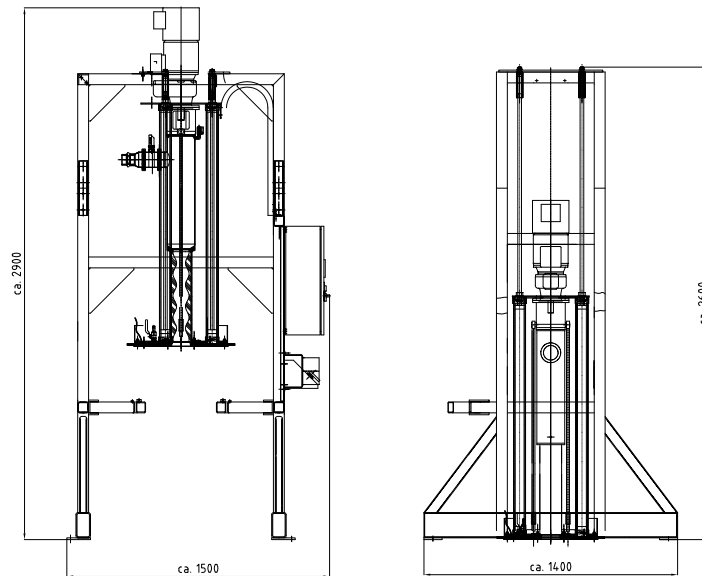

All data in mm

Item numbers

ViscoMT-XL, 2RD60, HNBR

152548

Optional design and components

- design with stainless steel base plate (movable with forklift or lift truck)
- design with stainless steel roller conveyor (for a quick barrel changing)
- frame made of mild steel powder coated
- two-point-pressure-control by a second pressure sensor at the end of the hose
- dosing control ViscoDos 3
- special widths available
- signal lamp red-yellow-green for displaying the current operating status, also available with buzzer
- pump actuation by AC-servo drive

Examples

